


MINIATURE UNITS, GENERAL PURPOSE Lubricators

L07 – G1/8, G1/4



Minimum clearance required to remove bowl

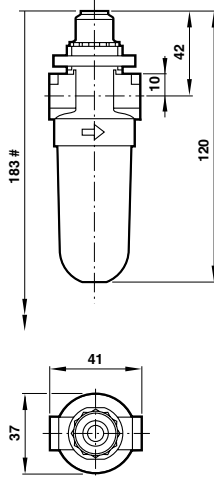

Micro-fog lubricators provide a fine mist for most general purpose pneumatic applications
Transparent bowl for 360° visibility

TECHNICAL DATA

Medium:

Compressed air only

Maximum inlet pressure:

10 bar

Start point:

0,24 dm³/s



Minimum flow required for lubricator operation at 6,3 bar inlet pressure

Ambient temperature:

-20°C to +50°C

Consult our Technical Service for use below +2°C

Models


L07 SERIES	Port size	Flow* (dm ³ /s)
Model		
		
		
L07-100-MPQG	G1/8	5
L07-200-MPQG	G1/4	6,7

Accessories

Neck mounting bracket

18-025-003
18-025-003

Service Kit


L07-KIT
L07-KIT

*Typical flow with 6,3 bar inlet pressure and 0,5 bar pressure drop

For further information
www.norgren.com/info/nec/en207

