


OLYMPIAN PLUS PLUG-IN SYSTEM

Breathing air sets

FFB64 – G1/4 to G3/8

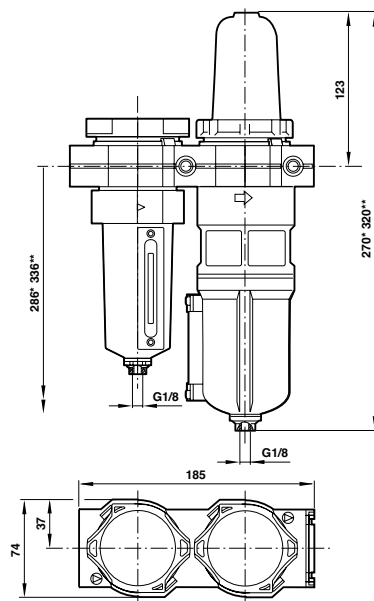

* 1 mask model **2 mask model

Pre-assembled combinations include a general purpose pre-filter and 'Ultraire'® oil/oil vapour removal filter

Activated carbon pack assists in the removal of hydro-carbon gases and odours

Pre filter extends life of oil removal filter

TECHNICAL DATA

Medium:

Compressed air only

Maximum inlet pressure:

17 bar

Remaining oil content:

0,003 mg/m³ (at 21°C)

Particle removal:

To 0,01 µm


Ambient temperature:

-20°C to +65°C

Consult our Technical Service for use below +2°C

Models

FFB64 SERIES AUTO DRAIN Model	Port size	Flow (dm ³ /s)	Number of masks	Primary pre-filter (µm)
-------------------------------------	--------------	------------------------------	--------------------	----------------------------



FFB64-208	G1/4	7	1	5
FFB64-308	G3/8	11	2	5

For service kit numbers refer to individual units

Accessories

Wall mounting bracket	Silencer (shut-off valve)	3/2 shut-off valve
--------------------------	------------------------------	-----------------------



74504-50	T40B1800	T64T-2GB-P1N
74504-50	T40B1800	T64T-3GB-P1N

For further information
www.norgren.com/info/nec/en197

