


BLOW GUNS BG Series




Models

Model No.	Port size	Description
BG4000	G1/4	Metal Blow Gun
BG5000	G1/4	Plastic Blow Gun

BG5000

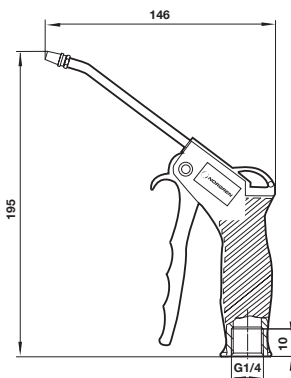


BG4000

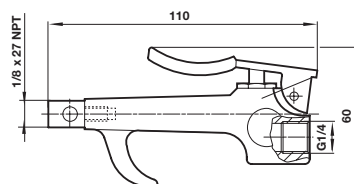

EXPRESS LINKS

Perfect partners...

For your blow gun and pre-set regulator see coiled hose and quick release couplings on pages 269 and 270.



BG4000:

Bright chrome finish
Cushioned corporate vinyl thumb grip
Exhausts air when nozzle is blocked
Complies with O.S.H.A.

BG5000:

One piece design in moulded high impact plastic
Exhausts air when nozzle is blocked
Complies with O.S.H.A.

TECHNICAL DATA

Medium:

Non-lubricated compressed air, filtered

Connection:

G1/4 (BG4000 and BG5000)

Operating pressure:

10 bar maximum line pressure

The USA O.S.H.A. recommendations state that nozzle pressures should not exceed 2 bar. This ensures that the blocked end condition pressure will not exceed the 0,4 bar that could penetrate human skin with possibly fatal consequences. Blow guns should always be supplied through a suitable pressure regulator to ensure safe operation

COMPLEMENTARY PRODUCT

R16 MINIATURE PRE-SET REGULATOR:

Factory pre-set and sealed to give a regulated pressure of 2 bar

Tamper resistant
Compact



Models

Model No.	Port size	Pre-set pressure
R16-200-R30D	G1/4	2 bar

For further information
www.norgren.com/info/nec/en281

